
REGLED

IT Apparecchio LED integrato
Corpo in materiale plastico
Diffusore in PC opale
Driver integrato

EN Built-in LED fitting
Plastic body
Opal PC diffuser
Built-in driver



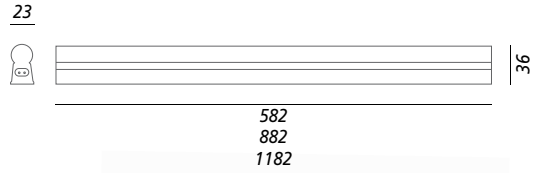

Accessori inclusi - Included Accessories







7W	10W	14W
max 15 pz.	max 10 pz.	max 8 pz.



LED A+

3000°K 7W | 4000°K 7W | 3000°K 10W | 4000°K 10W | 3000°K 14W | 4000°K 14W

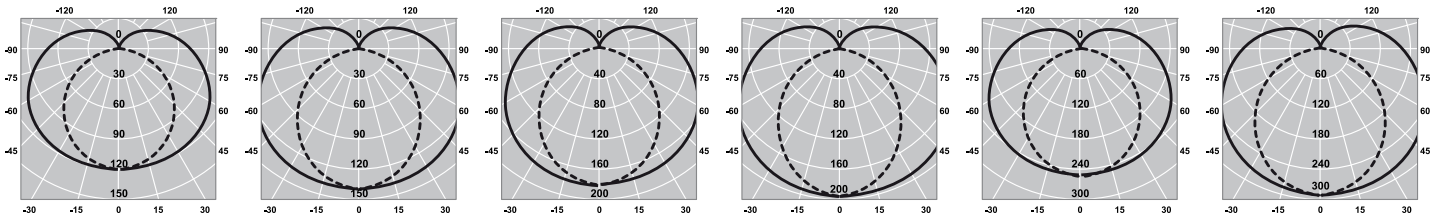

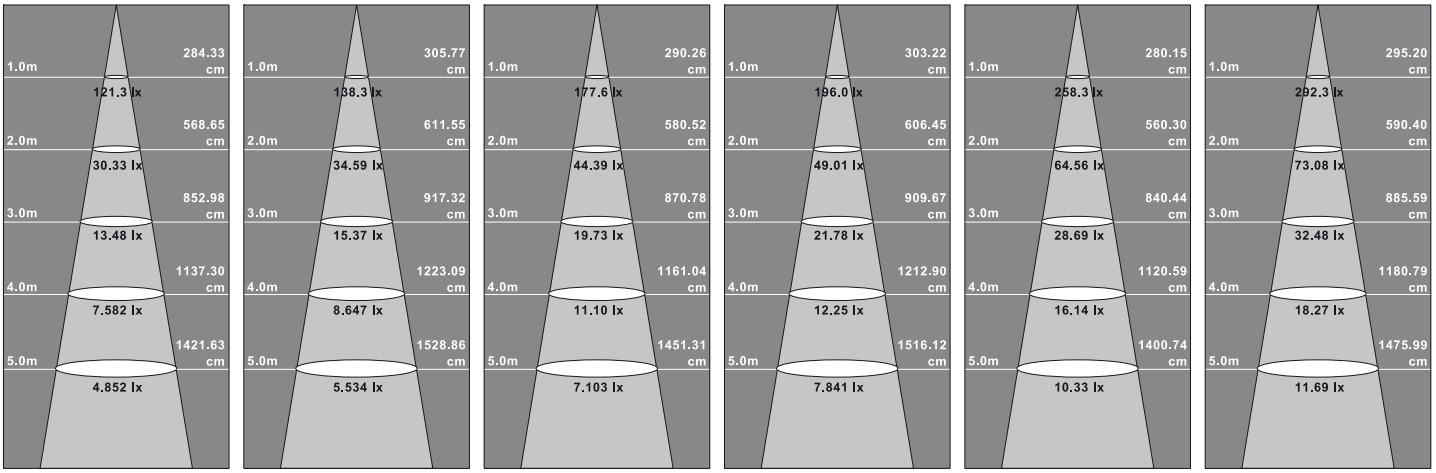

40284 mm. 582	130°	3000°K	650 lumens	CRI >80	LED SAN AN	7W	PF 0.90	230V 50/60Hz		IP20	0,12 Kg.	25	CE
40287 mm. 582	130°	4000°K	700 lumens	CRI >80	LED SAN AN	7W	PF 0.90	230V 50/60Hz		IP20	0,12 Kg.	25	CE
40285 mm. 882	130°	3000°K	950 lumens	CRI >80	LED SAN AN	10W	PF 0.90	230V 50/60Hz		IP20	0,16 Kg.	25	CE
40288 mm. 882	130°	4000°K	1000 lumens	CRI >80	LED SAN AN	10W	PF 0.90	230V 50/60Hz		IP20	0,16 Kg.	25	CE
40286 mm. 1182	130°	3000°K	1350 lumens	CRI >80	LED SAN AN	14W	PF 0.90	230V 50/60Hz		IP20	0,20 Kg.	25	CE
40289 mm. 1182	130°	4000°K	1400 lumens	CRI >80	LED SAN AN	14W	PF 0.90	230V 50/60Hz		IP20	0,20 Kg.	25	CE