TREVOS


CODE | EAN


106739 | PRIMA VALUE 1.5ft PC 8000/840 | 8596328067396




- Degree of protection: IP66
- Ambient temperature: -25—45 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 138 lm/W
- Colour rendering index CRI: 80-89, 4000—4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber (SBS)
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 16
- Max. number of luminaires per circuit breaker C16: 27
- Flickering value Pst LM: 0,076
- Power factor: 0,95
- Stroboscope effect value SVM: 0,022
- Total harmonic distortion: 10
- Energy efficiency class of the light source: D

- Body: grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white (RAL 9003)
- Clips: polyamide + 15 % fibreglass
- Sealing: polyurethane (PUR), foam-filled base groove
- Connection: screwless three-pole terminal block
- Resistant to dust, humidity and spraying water, the light fitting is suitable for both indoor and outdoor roofed industrial spaces
- Variable suspension spacing ranging from 970 - 1230 mm; enable the light to be installed onto suspension fittings left over from previous lighting
- Optimal mounting height: 3 to 8 m
- ON/OFF electronic driver (AC, DC on demand)

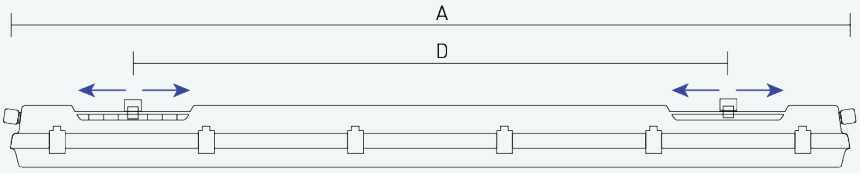





Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
106739	PRIMA VALUE 1.5ft PC 8000/840	45	8030	7470	54,3	138	2	1455	970 - 1230

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES

IP66 | up to ta -25°C | up to ta 45°C | 850°C | IK 10 | LED | WARRANTY 5 | D | 220-240 V 50/60 Hz | CRI >80 | CCT 4000 K 3 SDCM | L90 B10

CERTIFICATION

CE

DOWNLOAD

INSTALLATION MANUAL | DATA SHEET | CE | LDT DATA

TREVOS

CODE | EAN

106739 | PRIMA VALUE 1.5ft PC 8000/840 | 8596328067396



